

SWEP B30


The B30 is an asymmetric cross-flow heat exchanger. It is particularly suitable for gas-to-liquid applications and for tapping tributary flows from main streams. With 2½" piping, it handles water flow of up to 58 m³/h (255 gpm). It can be used as a suction gas heat exchanger in chillers of up to 350 kW, as an after cooler for air compressors of up to 175 kW and as an engine charge air cooler for engines over 1 MW. We have designed the B30 to offer a robustness which is superior to the normal BPHE designs, both in respect to static and cyclic loads.



Basic specifications

Maximum number of plates (NoP)	300
Max flow	58 m³/h (255.37 gpm)
Channel volume	0.105/0.081 dm³ (0.0037/0.0029 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	5.67+(0.171*NoP) kg 12.50+(0.377*NoP) lb
Max Particle Size (mm)	0.9

Standard dimensions

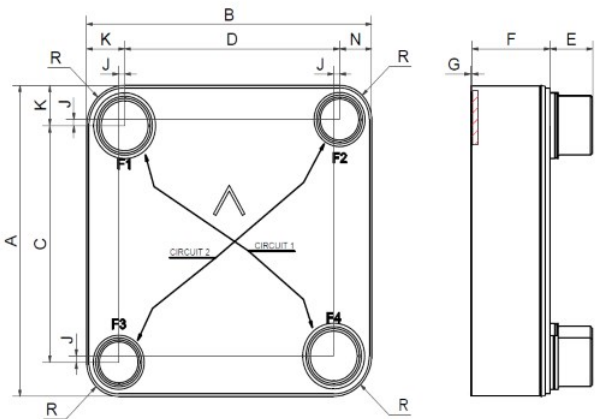

#	MM	IN
A	243.50	9.59
B	243.50	9.59
C	166.20	6.54
D	166.50	6.56
F	14,00+2,12*(NoP)	0.55+0.08 *(NoP)
G	2	0.08
J	7.50	0.3
K	42.30	1.67
L	35	1.38
N	34.80	1.37
R	35	1.38
E_1	54	2.13
E_2	27	1.06


Available connections




Threaded Connection Victaulic Connection Solder Connection Combo Connection Flange Connection Weld Connection

*For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.

PED Pressure / Temperature

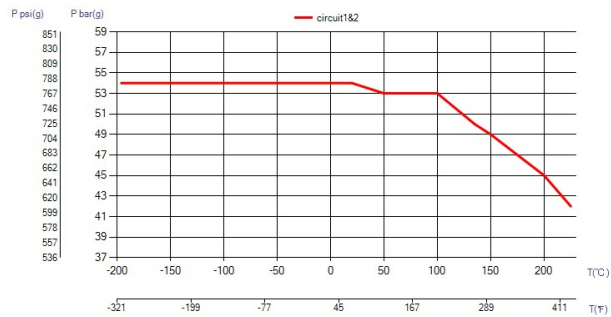

UL Pressure / Temperature

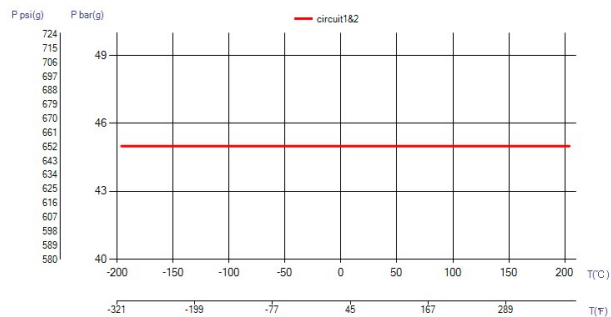

Product Concept

The Braze Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

3rd party Approvals

Most SWEP products are approved by below listed certification organizations: Europe, Pressure Equipment Directive (PED) America, Underwriters Laboratories Inc (UL) Japan, Kouatsu-Gas Hoan Kyoukai (KHK) Additionally SWEP holds approvals from a vast variety of other certification organizations. For more details please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.

Find product solution - SSP

With SWEP's unique SSP, the SWEP Software Package, you can do advanced heat transfer calculations yourself. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, SWEP offers all the service and support you need. Several SWEP accessories are also available to fulfill additional needs.

Disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still object to corrosion if used in unsuitable environments. Standard data is presented, product variants with different data may exist. Contact your SWEP sales representative for more details. SWEP may change any data without notice.

Product has crossflow circuits, see Instruction Manual on swep.net.